


SureColor® P7370

24-Inch Wide-Format Printer

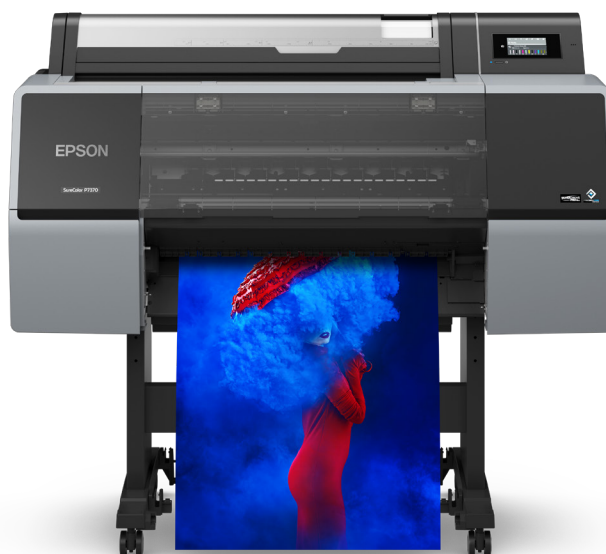

© Tim Tadder

The Art of Performance.



Epson Cloud Solution
PORT®

Advanced printhead design — 10-channel PrecisionCore® Micro TFP® 2.64" printhead performs at extreme speeds—dramatically faster than our previous generations

Extended color gamut — UltraChrome® PRO10 Ink with Violet delivers a wide range of blue hues

No Photo and Matte Black Ink switching — dedicated channels for Photo Black and Matte Black Inks eliminate the need to switch between inks, helping to improve efficiency and minimize ink waste

Industry-leading print permanence¹ — provides exhibition-quality, long-lasting prints

Intuitive operation — large 4.3" color LCD touchscreen allows for easy setup, control and maintenance

Reliable printer design — redesigned industrial-level print engine for lasting durability and an interior LED light for convenient operation

Extensive media handling — compatible with a wide variety of photographic and fine art roll media, sheet media and rigid boards up to 1.5 mm thick

Increased black density with Black Enhance Overcoat — improved Dmax for a wider contrast ratio with enhanced clarity and increased sharpness on glossy papers

Advanced software support for enhanced productivity — includes Epson Cloud Solution PORT®² for fleet management and Epson Print Layout software for simple print production

Designed for use exclusively with Epson ink cartridges.*

Print

Printing Technology PrecisionCore Micro TFP 10-channel, drop-on-demand printhead

Ink Type UltraChrome PRO10 pigment ink; 10-ink, 10-color ink configuration: Cyan, Light Cyan, Vivid Magenta, Vivid Light Magenta, Yellow, Gray, Light Gray, Photo Black, Matte Black and Violet

Nozzle Configuration Color and monochrome heads; 8,000 nozzles (800 nozzles x 10 channels)

Droplet Technology Smallest droplet size: 3.5 picoliters; Variable Droplet Technology can produce up to 3 different sizes per line

Maximum Resolution 2400 x 1200 dpi

Printer Speed¹

23.4" x 33.1" prints: Normal (BEO: off) 2:02; Normal (BEO: on) 4:04 (BEO=Black Enhance Overcoat)

Printer Language/Drivers Epson ESC/P™ raster photographic drivers standard

Ink⁴

In-Box Cartridge Fill Volume 110 mL each color x 10 colors total

Retail Cartridge Fill Volume 150 mL, 350 mL or 700 mL each color available x 10 colors total

This printer is designed for use with genuine Epson cartridges only, not third-party cartridges or ink*.

Roll Media Handling

Single Top-Loading Roll 24" wide

2" or 3" Core Diameter User-adjustable roll media adapters

Roll Cutting⁵ High-speed internal rotary cutter; auto or manual

Minimum Auto Cut Length 5.0" plus top and bottom margin (5.24" minimum)

Top/Bottom Margins (mm) Normal: 20/15 (Premium Luster Photo Paper); option: Top 3, 15, 20, 45/Bottom 3, 15

Left/Right Margins 3 mm each side; 0.24" total; or 0" at BorderFree™ sizes

Roll Paper Remaining Printable barcode tracking system

BorderFree Print Widths 10", 11.8", 13", 16", 17", 20", 20.3", 23.4", 24"

Sheet Media Handling

Single Sheet, Top-Loading Up to 24" wide

Sheet Loading Auto-loading if less than 0.5 mm thick

Media Thickness 0.8 mm to 1.5 mm

Top/Bottom Margins 3 mm/15 mm

Top/Bottom Margins with Centering On 15 mm/15 mm

Left/Right Margins 3 mm each side; 6 mm or 0.24" total; or 0" at BorderFree sizes

BorderFree Print Widths 10", 11.8", 13", 16", 17", 20", 20.3", 23.4", 24"

Printable Area and Accuracy

Maximum Paper Width 24"

Minimum Cut-Sheet Size 8.5" x 11"

Maximum Printable Roll Length⁶ 708.66"

Line Accuracy ±0.2% of specified length (±0.26 mm min.)

Printer Interfaces

Hi-Speed USB 2.0 (1 port) 1000Base-T/100-Base-TX/10Base-T Ethernet (1 port)

Operating Systems Supported⁷

Mac® OS X® 10.9.5 or later

Windows® 11, 10, 8.1, 7

General

Weight and Dimensions (W x D x H)

Basket Closed: 55.2" x 26.3" x 48" (1,401 mm x 667 mm x 1,218 mm)

Weight: 262.35 lb (119 kg) without ink cartridges

Acoustic Noise Level

Approximately 49.5 dB(A)

Temperature

Operating: 50 °F to 95 °F (10 °C to 35 °C)

Operating (Recommended): 50 °F to 95 °F (10 °C to 35 °C)

Storage: -4 °F to 104 °F (-20 °C to 40 °C)

Relative Humidity

Operating: 20% – 80% (no condensation)

Operating (Recommended): 20% – 80% (no condensation)

Storage: 5% – 85% (no condensation)

Electrical Requirements

Voltage: AC 100 V – 240 V

Frequency: 50 Hz – 60 Hz

Current: 1.6 A – 3.4 A

Power Consumption Printing: Approx. 70 W, Ready: Approx. 32 W,

Sleep Mode: Approx. 3.2 W, Power Off: Approx. 0.3 W

Standards and Approvals

Safety Standards: NRTL Certified

Country of Origin China

Eco Features

ENERGY STAR® qualified

RoHS compliant

End-of-life options available⁸

Epson America, Inc. is a SmartWay® Transport Partner⁹

Limited Warranty and Service

Warranty 1-year limited in the U.S. and Canada

Service On-Site Repair, usually Next-Business-Day;

toll-free telephone support, Monday through Friday

Epson Preferred Plus™ Extended Service Plans¹⁰

Plans below available only at the time of hardware purchase.

1-Year Next-Business-Day On-Site Repair¹¹ PSP7370S1

2-Year Next-Business-Day On-Site Repair¹¹ PSP7370S2

4-Year Next-Business-Day On-Site Repair¹¹ PSP7370S4

What's Included

SureColor P7370 Printer and Stand, Paper Catch Basket, Maintenance Tanks (quantity 1 installed), Initial Ink Cartridges (110 mL x 10 cartridges), AC Power Cable, User Guide Kit (Documentation and Warranty)

Ordering Information

SureColor P7370 Standard Edition	SCP7370SE
Maintenance Tank	T699700
Replacement Printer Cutter Blade	C12C815331
Additional Roll Media Adapters (pair)	C12C935931
Internal Print Server 320GB	C12C934551
Internal PostScript® Server	C12C934571
Replacement Borderless Kit	C13S210102
Maintenance/Cleaning Sticks	C13S090013

UltraChrome PRO10 Ink (700 mL⁴)

Photo Black Ink Cartridge	T56N120
Cyan Ink Cartridge	T56N220
Vivid Magenta Ink Cartridge	T56N320
Yellow Ink Cartridge	T56N420
Light Cyan Ink Cartridge	T56N520
Vivid Light Magenta Ink Cartridge	T56N620
Gray Ink Cartridge	T56N720
Matte Black Ink Cartridge	T56N820
Light Gray Ink Cartridge	T56N920
Violet Ink Cartridge	T56ND20

UltraChrome PRO10 Ink (350 mL⁴)

Photo Black Ink Cartridge	T56S120
Cyan Ink Cartridge	T56S220
Vivid Magenta Ink Cartridge	T56S320
Yellow Ink Cartridge	T56S420
Light Cyan Ink Cartridge	T56S520
Vivid Light Magenta Ink Cartridge	T56S620
Gray Ink Cartridge	T56S720
Matte Black Ink Cartridge	T56S820
Light Gray Ink Cartridge	T56S920
Violet Ink Cartridge	T56SD20

UltraChrome PRO10 Ink (150 mL⁴)

Photo Black Ink Cartridge	T56X120
Cyan Ink Cartridge	T56X220
Vivid Magenta Ink Cartridge	T56X320
Yellow Ink Cartridge	T56X420
Light Cyan Ink Cartridge	T56X520
Vivid Light Magenta Ink Cartridge	T56X620
Gray Ink Cartridge	T56X720
Matte Black Ink Cartridge	T56X820
Light Gray Ink Cartridge	T56X920
Violet Ink Cartridge	T56XD20

* This product uses only genuine Epson-brand ink cartridges. Other brands of ink cartridges and ink supplies are not compatible and, even if described as compatible, may not function properly or at all.

1 Ink lightfastness rating based on accelerated testing of the same ink formulation for prints on specialty media, displayed indoors, under glass. Actual print stability will vary according to media, printed image, display conditions, light intensity, humidity and atmospheric conditions. Epson does not guarantee longevity of prints. For maximum print life, display all prints under glass or lamination or properly store them. | **2** All features of this system require an active Internet connection and the use of a supported browser. | **3** Print speeds are based on the print engine speed only. Total throughput time for any print depends on various factors including workstation configuration, file size, print resolution, ink coverage and networking. Actual print speeds will vary. | **4** Part of the ink from the first cartridges/packs is used for initializing the printer. Ink usage will vary considerably based on images printed, print settings, paper type, frequency of use, temperature and humidity. Variance may be more pronounced when printing infrequently or predominantly with one ink color. Ink is used for printing and printer maintenance and all colors must be available for printing. For print quality, a variable amount of ink remains after the "replace ink" indicator comes on. | **5** High-volume cutting of canvas and heavy media stocks may require frequent cutter replacement. | **6** Allowed by printer driver for Mac and PC. Application, version of application and operating system version may limit maximum length. | **7** For the latest drivers, visit epson.com/support | **8** For convenient and reasonable recycling options, visit epson.com/recycle | **9** SmartWay is an innovative partnership of the U.S. Environmental Protection Agency that reduces greenhouse gases and other air pollutants and improves fuel efficiency. | **10** Product comes with a 1-year limited warranty with the option to purchase extended service plans up to a total of 5 years of continuous coverage. | **11** Geographic limitations may apply. Service request must be received and processed by 1 p.m. Pacific Time, Monday through Friday, excluding holidays. See limited warranty or service plan for details.

See the latest innovations from Epson Business Solutions at epson.com/forbusiness



Epson America, Inc.
3131 Katella Ave., Los Alamitos, CA 90720

Epson Canada Limited
185 Renfrew Drive, Markham, Ontario L3R 6G3

www.epson.com
www.epson.ca

Specifications and terms are subject to change without notice. EPSON, Epson Cloud Solution PORT, PrecisionCore, SureColor, TFP and UltraChrome are registered trademarks and Epson ESC/P is a trademark of Seiko Epson Corporation. BorderFree and Epson Preferred Plus are trademarks of Epson America, Inc. Mac and OS X are trademarks of Apple Inc., registered in the U.S. and other countries. Windows is a trademark of the Microsoft group of companies. SmartWay is a registered trademark of the U.S. Environmental Protection Agency. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. Copyright 2025 Epson America, Inc. CPD-65571 4/25

Contact: